

CENTRALIZED LUBRICATION SYSTEMS

SOLENOID VALVE

This compact low wattage 3-way valve is ideally suited for operating the PMP100. This 3-way valve should be mounted close to the PMP100 to insure a fast response time and minimize the quantity of compressed air used.

Standard Materials:


- Brass body (with two #8-32UNF-2B mounting holes) and stainless steel internals compatible with air, water and inert gasses
- Class F, Nema 4 / 4X molded coil

Standard Features:

- 1/8-27 NPT inlet and outlet ports
- 1/16 inch diameter orifice
- #10-32UNF-2B exhaust port
- #20 AWG lead wires, 18 inches long

Operating Conditions:

- For operation on 120V, 60Hz, 1Ph; 6W
- 125 PSIG max working pressure
- -40°F(-40°C) to +180°F(+82°C) media temperature
- +311°F(+155°C) max coil operating temperature

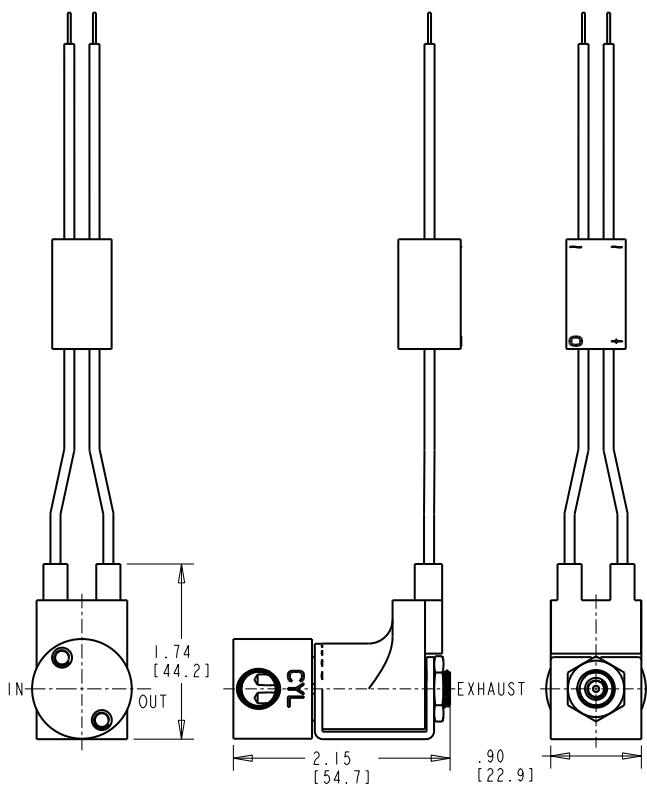

Solenoid Valve

Part No.

832160

Dimensions and specifications are subject to change without notice. Not all items are Made-To-Stock, contact us for availability.

02/14

Ph : 920-682-6877
Fx : 920-684-7210

LDI Industries

sales@ldi-industries.com
www.ldi-industries.com