CHAIN OILERS & APPLICATORS


REB SERIES

The REB Series of electro chain oilers offers a selection of nine long wearing nylon or stainless steel bristle brushes. For automatic operation, wire the normally closed solenoid across machine starting switch; feeding stops when machine is turned off. Fill cap with side vent minimizes the possibility of dust and dirt entering the reservoir.

There are five sizes of flat brushes available allowing inexpensive brush replacement at a fraction of former cost. Flat brushes can be set at bias to adapt to width needed or be trimmed to suit individual preferences.

Standard Materials:

- Aluminum top and bottom plates
- Buna N seals
- Break resistant, colorless transparent polymer
- Class "B" molded water resistant coil

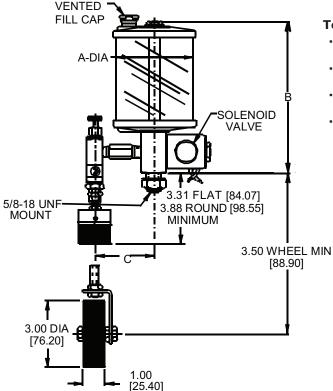

NOTE: All dimensions are inches [mm]

REB Series				
Part No.	Capacity	A inches (mm)	B inches (mm)	C inches (mm)
REB303	2.50 oz	2.00	4.69	1.62
	(73.90 mL)	(50.80)	(119.13)	(41.15)
REB304	5.00 oz	2.50	5.19	1.88
	(147.90 mL)	(63.50)	(131.83)	(47.75)
REB306	9.00 oz	3.00	6.00	2.44
	(266.20 mL)	(76.20)	(152.40)	(61.98)
REB307	12.00 oz	3.00	7.00	2.44
	(354.90 mL)	(76.20)	(177.80)	(61.98)
REB308	1.00 pt	3.50	7.00	2.56
	(.47 L)	(88.90)	(177.80)	(65.02)
REB309	1.00 qt	4.25	8.44	2.88
	(.95 L)	(107.95)	(214.38)	(73.15)
REB310	.50 gal	5.50	10.44	3.62
	(1.90 L)	(139.70)	(265.18)	(91.95)
REB311	1.00 gal	5.50	15.44	3.62
	(3.80 L)	(139.70)	(392.18)	(91.95)

Standard Features:

- Central mounting shank facilitates mounting to customer supplied bracket
- $\mbox{-} \mbox{Reservoir provides a quick, visual check of fluid level and condition}$
- Unit is easily disassembled for occasional cleaning

Temperature and Pressure Ratings:

- Polymer maximum working temperature up to 140°F (60°C)
- Nylon brush maximum working temperature up to 250°C (121°C)
- Stainless steel brush for maximum working temperature over 250°F (121°C)
- Ratings are at atmospheric pressure



ORDERING OPTIONS:

Order Suffix	Option		
	Material		
-N	Nylon bristle		
-S	Stainless steel bristle		
	Size		
-1	.50 in x .38 in (12.70 mm x 9.65 mm) flat brush		
-2	.75 in x .38 in (19.05 mm x 9.65 mm) flat brush		
-3	1.00 in x .38 in (25.40 mm x 9.65 mm) flat brush		
-4	1.50 in x .38 in (38.10 mm x 9.65 mm) flat brush		
-5	2.25 in x .38 in (57.15 mm x 9.65 mm) flat brush		
-6	.62 in (15.75 mm) diameter round brush		
-7	1.00 in (25.40 mm) diameter round brush		
-8	1.50 in (38.10 mm) diameter round brush		
-9	3.00 in (76.20 mm) diameter x 1.00 in (25.40 mm) rotary wheel		
	Solenoid Valve		
-26	120V, 60Hz, 1 Ph class B		
-27	240V, 60Hz, 1 Ph class B		
-28	480V, 60Hz, 1 Ph class B		
-43	24V DC		
HOW TO ORDER			

HOW TO ORDEI EXAMPLE:

REB309-N-

-4-26 – 120V, 60Hz, 1 Ph class B

- 1.50 in x .38 in (38.10 mm x 9.65 mm) flat brush
 Nylon bristle
 - Series REB309, 1 quart (.95 L) capacity reservoir

Dimensions and specifications are subject to change without notice. Not all items are Made-To-Stock, contact us for availability.

Ph: 920-682-6877 Fx: 920-684-7210



sales@ldi-industries.com www.ldi-industries.com

04/23