

# CHAIN OILERS & APPLICATORS

## SB SERIES

The SB Series of shank brushes can be remotely mounted and fed from valves on a central dispenser. Available with either round or flat brush.


### Standard Materials:

- Aluminum construction
- Pipe threads are dryseal
- Brush material either nylon or stainless steel

### Temperature Ratings:

- Nylon maximum working temperature up to 250°F (121°C)
- For temperatures over 250°F (121°C), please specify stainless steel


SB Series - Round Shank Brush				
Part No.	Brush Material	A Dia inches (mm)	B Dia inches (mm)	C inches (mm)
SB102-2	Nylon	.62 (15.75)	1.00 (25.40)	3.00 (76.20)
SB103-2	Nylon	1.00 (25.40)	1.62 (41.15)	3.62 (91.95)
SB104-2	Nylon	1.50 (38.10)	1.62 (41.15)	3.62 (91.95)

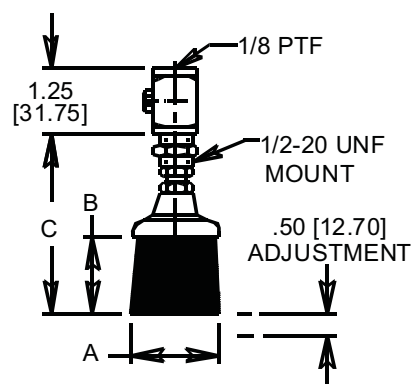

NOTE: All dimensions are inches [mm]


SB Series - Flat Shank Brush		
Part No.	Brush Material	A inches (mm)
SB301-2	Nylon	.50 (12.70)
SB303-2		1.00 (25.40)
SB304-2	Nylon	1.50 (38.10)
SB305-2		2.25 (57.15)

- Four sizes of flat insertable brushes are available
- .50 in (12.70 mm) adjustment for wear is provided

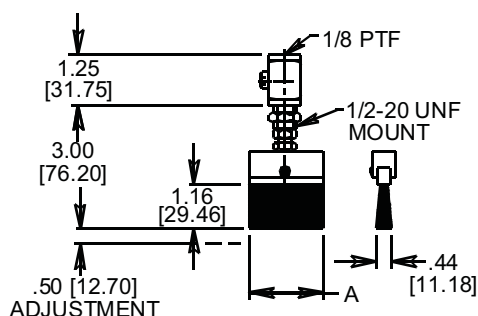

NOTE: All dimensions are inches [mm]

SB Series - Round & Flat Brush w/Pipe Thread				
Part No.	Brush Material	A inches (mm)	B inches (mm)	C inches (mm)
SB204-2	Nylon	1.50 Dia round (38.10)	1.62 (41.15)	3.00 (76.20)
SB204-3	Stainless Steel			
SB354-2	Nylon	1.50 x .44 Flat (38.10 x 11.18)	1.16 (29.46)	2.38 (60.45)
SB354-3	Stainless Steel			
SB355-2	Nylon	2.25 x .44 Flat (57.15 x 11.18)	1.16 (29.46)	2.38 (60.45)
SB355-3	Stainless Steel			

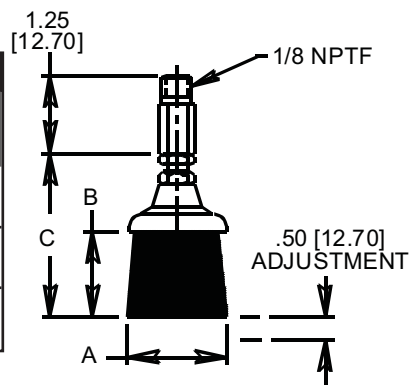

NOTE: All dimensions are inches [mm]

NOTE: ALL SHANK BRUSHES SHOWN ON THIS SHEET REQUIRE SEPARATE CONTROL FOR FLUID METERING

Dimensions and specifications are subject to change without notice. Not all items are Made-To-Stock, contact us for availability.

02/14

Ph : 920-682-6877  
Fx : 920-684-7210

**LDI** Industries

sales@ldi-industries.com  
www.ldi-industries.com