

FLOW SIGHTS

F300 SERIES

Wide view flow sights can be used in either horizontal or vertical pipe runs to observe fluid flow clarity. Large cylindrical sight allows 360° viewing and flow is readily seen from a distance, in elevated or dimly lighted conditions. In vertical pipe run, fluid flow should come in from bottom to note ball action as a flow indicator. The ball stop slightly restricts flow.

Standard Materials:


- Brass construction
- Borosilicate sight
- Buna N seals
- Nylon ball indicator

Temperature and Pressure Ratings:

- Noted below in chart

Caution:

Scratched glass significantly reduces pressure rating.

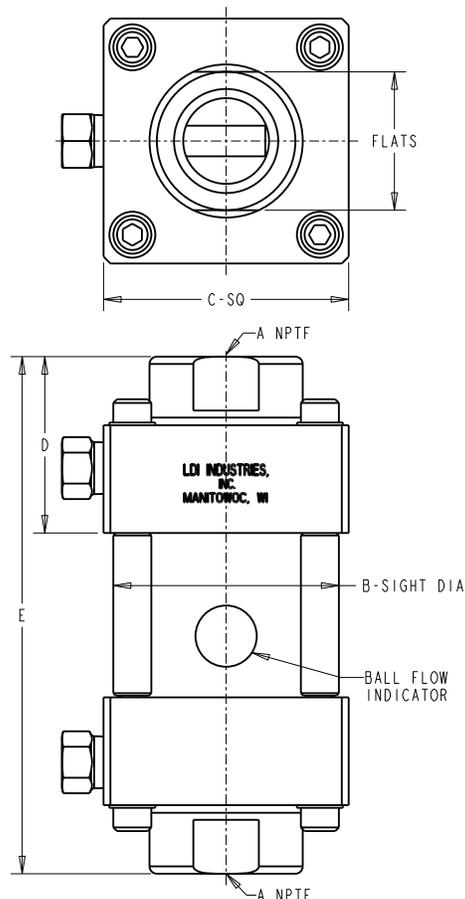

F300 Series						Max Working Pressure @ Temperature Shown	
Part No.	A Female NPTF	B inches (mm)	C inches (mm)	D inches (mm)	E inches (mm)	PSI (kPa)	°F (°C)
F301-04-01	1/2-14	1.75 (44.45)	2.00 (50.80)	1.44 (36.58)	4.25 (107.95)	130 (896)	212 (100)
F301-05-01	3/4-14	1.75 (44.45)	2.00 (50.80)	1.44 (36.58)	4.25 (107.95)	130 (896)	212 (100)
F301-06-01	1-11 1/2	1.75 (44.45)	2.25 (57.15)	1.75 (44.45)	4.88 (123.95)	130 (896)	212 (100)
F301-07-01	1 1/4-11 1/2	2.50 (63.50)	3.00 (76.20)	1.75 (44.45)	5.62 (142.75)	100 (690)	185 (85)
F301-08-01	1 1/2-11 1/2	2.50 (63.50)	3.00 (76.20)	1.88 (47.75)	5.88 (149.35)	100 (690)	185 (85)
F301-09-01	2-11 1/2	3.50 (88.90)	4.00 (101.60)	1.88 (47.75)	7.50 (190.50)	60 (414)	150 (65)

**MODIFICATIONS AVAILABLE MADE TO ORDER - CONSULT OUR FACTORY
(MINIMUM ORDER MAY BE REQUIRED)**

Dimensions and specifications are subject to change without notice. Not all items are Made-To-Stock, contact us for availability.

02/14

Ph : 920-682-6877
Fx : 920-684-7210



sales@ldi-industries.com
www.ldi-industries.com