

# METERING & SHUT OFF VALVES

## NVM SERIES

The NVM Series is designed for controlled multiple oiling from central location. Lubricant, (in reservoir of dispenser) individually metered at valve bank, travels to various points servicing hard to get at places, and eliminating individual oil cups. Easily disassembled for cleaning. Individual valves remove without disturbing other components. Gravity feed valves are furnished with a vented sight chamber, provided by a split in the gasket above the sight glass.

### Standard Features:


- Pressure units supplied with non-vented sight
- 2 to 8 feeds available

### Standard Materials:

- Aluminum Construction
- Buna N seals
- Gage glass sight

### Pressure Rating:

- Pressure applications up to 125 PSI (862 kPa) non-vented

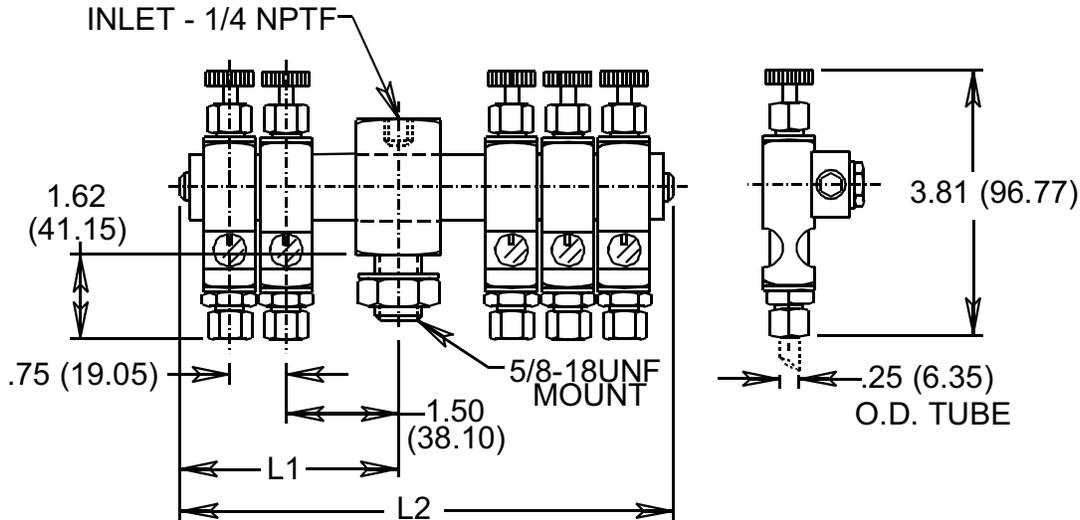

NOTE: All dimensions are inches (mm)



NVM Series				
Part No.		Feeds	L1 inches (mm)	L2 inches (mm)
Gravity Vented Sight	Pressure Non-Vented Sight			
NVM102-002	NVM102-102	2	2.09 (53.09)	4.19 (106.43)
NVM102-003	NVM102-103	3	2.09 (53.09)	4.94 (125.48)
NVM102-004	NVM102-104	4	2.84 (72.14)	5.69 (144.53)
NVM102-005	NVM102-105	5	2.84 (72.14)	6.44 (163.58)
NVM102-006	NVM102-106	6	3.59 (91.19)	7.19 (182.63)
NVM102-008	NVM102-108	8	4.34 (110.24)	8.69 (220.73)

**MODIFICATIONS AVAILABLE MADE TO ORDER - CONSULT OUR FACTORY  
(MINIMUM ORDER MAY BE REQUIRED)**

Dimensions and specifications are subject to change without notice. Not all items are Made-To-Stock, contact us for availability.

02/14

Ph : 920-682-6877  
Fx : 920-684-7210



sales@ldi-industries.com  
www.ldi-industries.com