

PRESSURE GAGES

VPG SERIES

Glycerine filled Pressure Gages provide added durability in applications where vibration or pulsation is present. Stainless Steel case and bezel, copper alloy internals. Available in both Lower and U-Clamp Panel Mount.

Standard Features:

- 2.5 inch dial
- 1/4 inch NPT thread connection
- Glycerine filled
- Stainless Steel case and bezel
- Copper Alloy internals
- Polycarbonate lens
- Dual Scale -- PSI/Bar (x 100 = kPa)

Ambient Temperature:


- 30°F to 160°F (-1°C to 71°C)

Accuracy:


- 2-1-2% of span ASME B40.1 Grade A



2.50 inch Gage

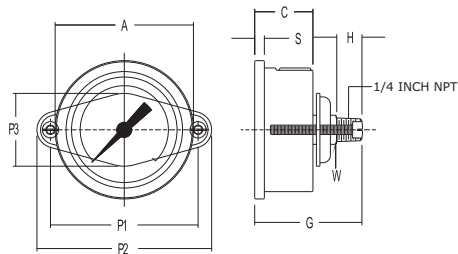

Panel Mount

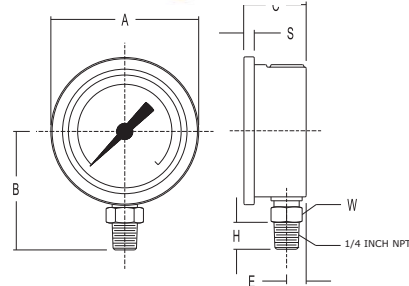

Stem Mount

VPG Series											
Dimensions	A*	B	C	S	W	E	G	H	P1	P2	P3
in	2.50	1.97	1.20	0.22	.563	0.39	2.12	0.51	2.83	3.84	1.50
mm	63.00	50.00	30.50	5.60	14.00	10.00	53.85	13.00	72.00	97.50	38.00

*Nominal Size

How to Order

VPG	25	N	1K	L
Type	Size	Thread Type	Standard Range	Mounting
Pressure Gage Liquid filled	25 = 2.50 (63 mm)	N=NPT	▲ 10=0-100 PSI 30=0-300 PSI 60=0-600 PSI 1K=0-1000 PSI 150=0-1500 PSI 2K=0-2000 PSI 3K=0-3000 PSI 5K=0-5000 PSI 6K=0-6000 PSI 10K=0-10000 PSI	B=Panel L=Stem
Options				
• Dial Face Artwork—2.50 inch • Special Liquid—Silicone • Glass Face—Resists solvents and abrasives				
Options requirements				
• 125 minimum order • 12 week lead time				
▲ - Stem Mount Only				

Dimensions and specifications are subject to change without notice. Not all items are Made-To-Stock, contact us for availability.

06/17

Ph : 920-682-6877
Fx : 920-684-7210

LDI Industries

sales@ldi-industries.com
www.ldi-industries.com