

# SIGHT GAGES - CLOSED CIRCUIT

## G623 SERIES

G623 Series front mount closed circuit low profile sight gages are molded from a clear Nylon providing 180° of viewing. A white insert integral to the sight gage helps draw eye contact to the fluid level quickly.

### Standard Features:

- Front mount
- Tough, break resistant, transparent molded Nylon gage body
- 180° of viewing fluid level (without metal guard)
- Viewing enhanced by white background integral to molded gage body
- Suitable for use with most hydraulic and machine lubricating oils

### Standard Materials:

- Constructed with a molded, transparent Nylon
- Buna N seals
- Black, powder coated steel guard


### Temperature and Pressure Ratings:

- 212°F (100°C) maximum operating temperature
- 50 psi (345 kPa) maximum operating pressure at 70°F (21°C)
- Please refer to Temperature Ratings by Seal Material for additional operating conditions (Appendix RA-5 on page RA-A5)

### NOTE:

- Please refer to Appendix RA-9 on page RA-A9 for installation instructions

**CAUTION:** •Not recommended for use with alcohol or steam

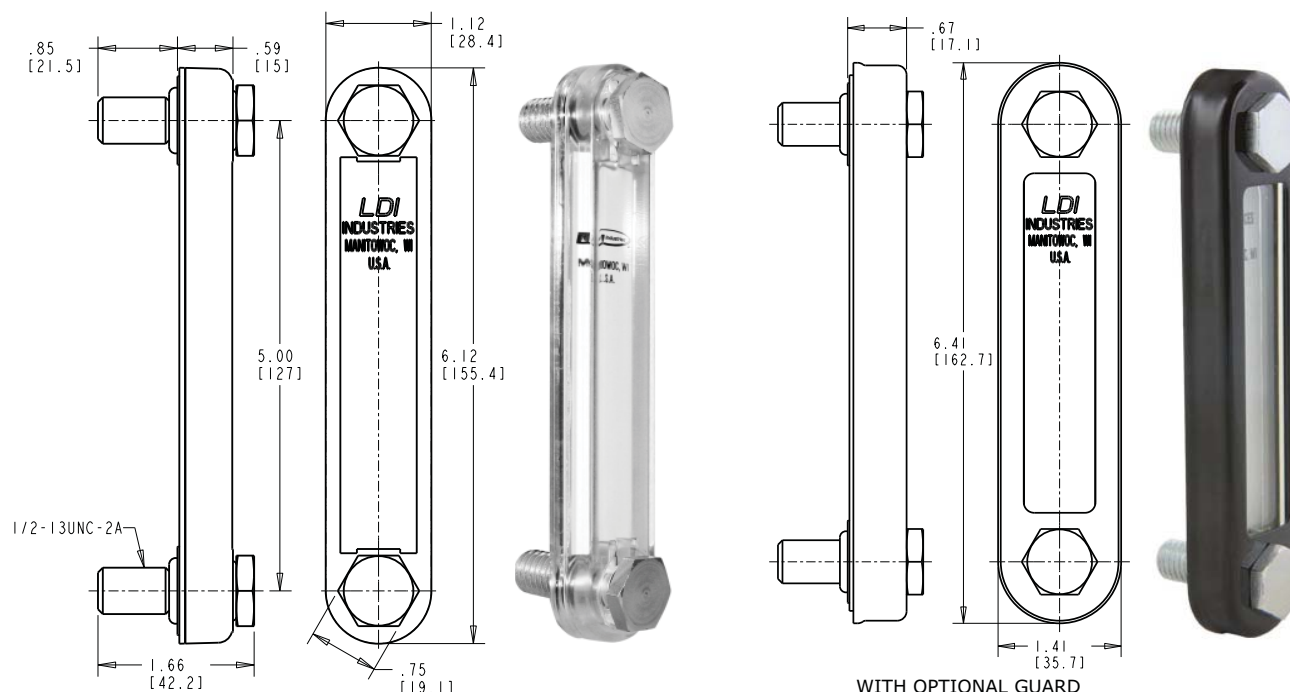

**NOTE:** All dimensions are inches [mm]

### ORDERING OPTIONS CODES:

#### SEAL MATERIAL

- 1- Buna N seals (standard)
- 3- Viton® seals (optional)
- M- M12 x 1.75 bolts (optional)
- G- Guard (optional)

### HOW TO ORDER

#### EXAMPLE:

**G623-05-PG-1C** — 1/2-13 UNC bolts, std  
 — Buna N Seals  
 — Guard  
 — Polymer body  
 — 5.00 (127.00 mm) mounting centers  
 — Series G623

Dimensions and specifications are subject to change without notice. Not all items are Made-To-Stock, contact us for availability.

02/15

Ph : 920-682-6877  
 Fx : 920-684-7210



sales@ldi-industries.com  
 www.ldi-industries.com