

SIGHT PLUGS

LSP701 SERIES

The LSP701 Series low pressure aluminum sight plug has a clear glass sight with 4-bolt flange mounting pad. The sight plug installs through a clearance hole and utilizes a flange gasket compressed uniformly with four socket head cap screws to create a low profile assembly. Access to inside of reservoir is not required. Box quantities may apply.

Standard Features:

- Clear glass sight
- (4) Socket Head Cap Screws


Standard Materials:

- Plug and reflector material: Aluminum
- Seal Material: Buna N filled Cork
- Sight material: Soda lime glass

Temperature and Pressure Ratings:

- Maximum operating temperature up to 250°F (121°C).
(For applications requiring maximum operating temperatures in excess of 250°F (121°C), consult factory for available options.)
- 10 psi (69 kPa) maximum operating pressure at 69°F (20°C)

CAUTION: • Not recommended for steam applications
• Scratched glass significantly reduces the pressure rating of the sight plug

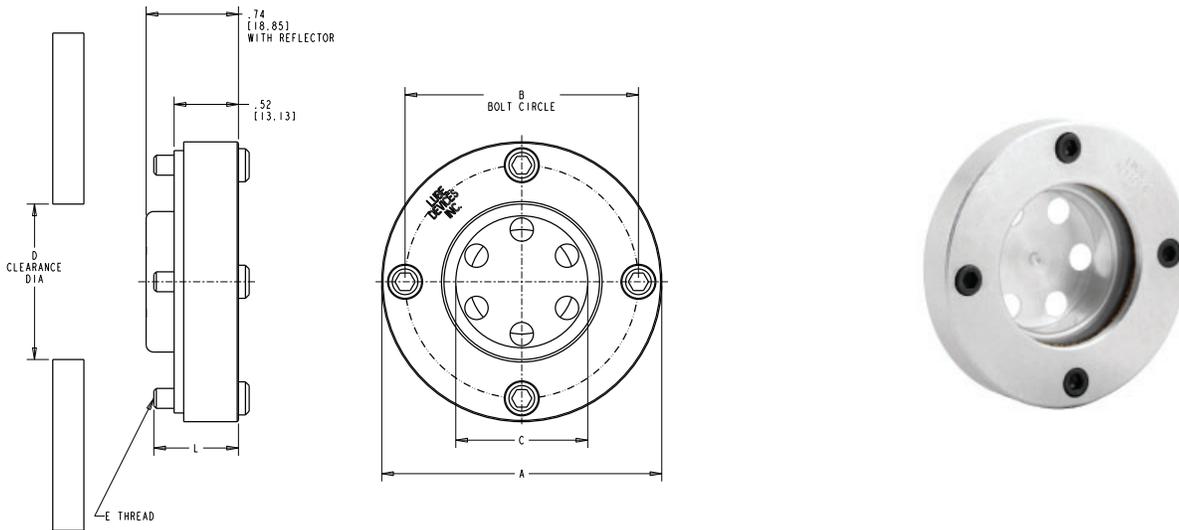

NOTE: All dimensions are inches [mm]

LSP701 Series						
Part No.	A inches (mm)	B inches (mm)	C inches (mm)	D inches (mm)	E thread	L inches (mm)
LSP701-10-01	2.25 (57.15)	1.88 (47.75)	1.06 (26.92)	1.25 (31.75)	8-32UNF	.68 (17.27)
LSP701-12-01	2.62 (66.55)	2.16 (54.86)	1.31 (33.27)	1.50 (38.10)	8-32UNF	.68 (17.27)

Dimensions and specifications are subject to change without notice. Not all items are Made-To-Stock, contact us for availability.

12/22

Ph : 920-682-6877
Fx : 920-684-7210



sales@ldi-industries.com
www.ldi-industries.com