

SUCTION STRAINERS

SSTM SERIES — TANK MOUNTED

SSTM Series Tank Mounted Suction Strainers offer easy installation. Access to reservoir interior is not required. You can mount these units through a sidewall.

Standard Features:


- Epoxy bonded bushing
- Nominal filter rating of 140 microns

Standard Materials:

- Cast iron bushing
- Pleated 100 mesh stainless wire cloth
- Steel support tube

Ordering Information:

- To specify 5 PSI By-Pass option, add-RV5 to Part Number

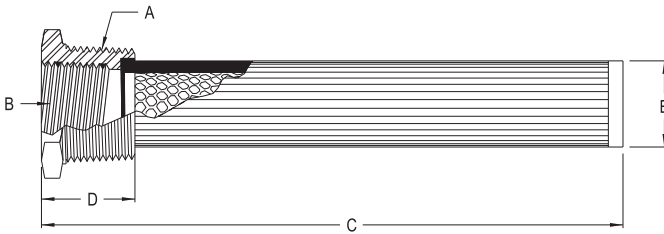

SSTM Series											
Part No.	GPM Rating	A NPT (inch)	B NPT (inch)	Dimensions							
				C		D		E		Screen Area	
				in	mm	in	mm	in	mm	in ²	cm ²
SSTM5	5	1	1/2	5.34	136.00	1.06	27.00	1.17	30.00	35.00	225.00
SSTM10	10	1 1/4	3/4	8.17	207.00	1.20	30.00	1.36	34.00	64.00	412.00
SSTM15	15	1 1/2	1	8.20	208.00	1.22	31.00	1.66	42.00	86.00	554.00
SSTM25	25	2	1 1/4	9.04	230.00	1.35	34.00	2.12	54.00	125.00	806.00
SSTM50	50	3	2	9.70	246.00	1.70	43.00	3.00	76.00	260.00	1328.00
SSTM100	100	4	3	11.30	287.00	1.80	46.00	4.00	102.00	315.00	2032.00

Dimensions and specifications are subject to change without notice. Not all items are Made-To-Stock, contact us for availability.

02/14

Ph : 920-682-6877
Fx : 920-684-7210



sales@ldi-industries.com
www.ldi-industries.com